

Lecture 27, June 3, 2026

Why Elections?

Topic of current interest

- This election is important
- Most places will use some form of electronic voting (e-voting) systems
- Lots of FUD (fear, uncertainty, doubt) flying around
 - About election systems being inaccurate
 - About foreign actors rigging electronic voting machines
 - About requiring IDs to vote
 - ...

Key Questions

- Does using computers in an election process:
 - Introduce new ways for attackers to compromise the election, or prevent voters from voting?
 - Stop any of the previous ways for attackers to compromise the election, or provide new ways to enable voters to vote?



Some Terms for E-Voting Systems

- BMD: Ballot Marking Device
 - Marks a paper ballot
- DRE: Direct Recording Electronic
 - Stores votes (ballots) electronically
- DRE + VVPAT: DRE + Voter Verified Paper Audit Trail
 - A DRE that also prints a paper record of the votes (ballots) cast on it
- PCOS: Precinct Count Optical Scanners
 - Used to count paper ballots at the precinct (polling station); these are stored electronically and the memory cards used to transfer results to central vote tabulator



Some Terms for Elections

- Race
 - An element on a ballot that people vote on
- Overvote
 - More votes cast by a voter in a particular race than is allowed for a voter
- Undervote
 - Fewer votes cast by a voter in a particular race than is allowed for a voter
- Example
 - Race is 3 open seats for city council, 5 candidates for those seats
 - I vote for 2 of them, not 3: that's an undervote and it counts
 - I vote for 4 of them, not 3: that's an overvote and it doesn't count

How an Election Works in Yolo County, CA

- Voters:

- Go to polling station, give name, possibly proof of identity
- Get ballot, enter booth, vote using marker to mark ballot
- Put ballot in protective sleeve, leave booth
- Drop ballot into ballot box
 - If provisional or conditional, put ballot and sleeve into envelope with voter's name, reason for the challenge (provisional) or condition (conditional) on the *outside*



- Vote-by-mail voters:

- Fill in ballot
- Put ballot into inner envelope
- Put inner envelope into mailing envelope; sign the *outside* and mail it in

End of the Day

- Election officials take ballot box to County seat
- Election officials remove ballots from envelopes
 - Provisional and conditional ballots handled separately
- Ballots counted, put into bags marked with precinct and count
- Ballots removed from bag, run through automatic counters
 - Humans intervene when problems arise
 - Intermediate tallies written onto flash cards
 - Every so often, cards removed, walked to tally computer, inserted, votes counted
- Reported tallies periodically updated, given for posting to web



And Then . . .

- All places have provisional ballots
 - These are cast when it is unclear if the person is allowed to vote
 - In California, *always* on paper, never electronic
- California allows conditional ballots
 - These are cast by folks who register at the election (same day registration)
- Conditional and provisional ballots must be validated before being counted
- California also allows mail-in ballots arriving up to 3 days after Election Day to be counted

The Canvass

Required by California law:

- Ballots for 1% of precincts counted by hand
 - Chosen with throw of dice; if some races not in precincts selected, add more in until all covered
 - Some counties have legal authority to use risk-limiting audit as well or instead
 - In California, you *must* use paper for this (hence, all DREs have VVPATs)
- Compared to tallies from election
 - If different, must be reconciled
- Certify final counts to Secretary of State
 - Has to be done within some number of days after election



Some Election Requirements


- Voter validation (authenticated, registered, has not yet voted)
- Ballot validation (voter uses right ballot, results of marking capture intent of voter as required by law)
- Voter privacy, secrecy (no association between voter, ballot; includes preventing voter showing others how he/she voted)
- Integrity (ballots unchanged, votes tallied accurately)

Some Election Requirements

- Voting availability (voter must be able to vote, materials must be available)
- Voting reliability (voting mechanisms must work, even under adverse circumstances)
- Election manageability (process must be usable by those involved, including poll workers)
- Election transparency (audit election process, verify everything done right)

What Should an E-Voting System Do?

- Replace manual activity, existing technology used in election process with better technology
 - Better in the sense of improving some aspect of the election process
- Examples
 - Easier to program ballots than print them
 - Can handle multiple languages easily
 - Easier to tally than hand counting

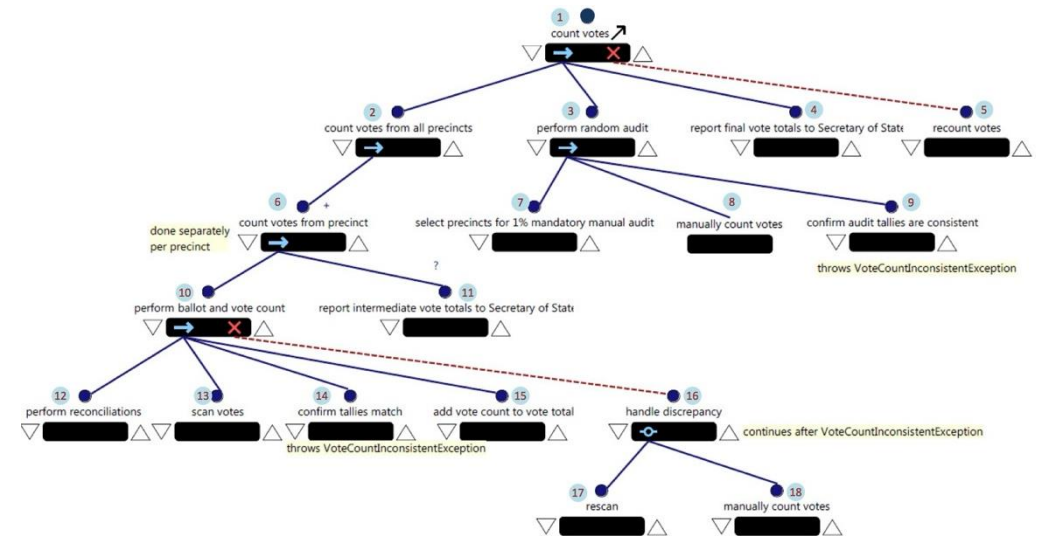

Assurance

- Provide sufficient evidence of assurance to target audience that using e-voting systems makes elections at least as secure, accurate, etc. as elections without them (that is, using paper ballots)
- Who is “target audience”?
 - Computer scientists, election officials, politicians, *average person*

Brief History

- Presidential election of 2000: massive confusion over ballots, and counting ballots, in Florida
 - Butterfly ballots did not align properly
 - Hanging chads made determining some votes difficult
- Help America Vote Act appropriated money to pay for electronic voting systems
- Federal standards developed by FEC
 - Voluntary Voting System Guidelines
 - NIST developing next generation


Problems Developed in Testing

- 2003: Johns Hopkins people analyzed voting system program
- January 2004: RABA study of Diebold systems in Maryland
- April 2004: Diebold made available updates that were not certified
- Summer 2007: CA top-to-bottom review
 - Followed by EVEREST review in Ohio
- 2011: Washington DC internet voting test compromised
 - And the friendly attackers threw out the hostile ones
- 2014: Analysis of Estonia e-voting systems: many vulnerabilities found
- 2020: Voatz mobile voting app based on “blockchain technology”: many vulnerabilities found

Problems Developed in Use


- Boone County, IN, 2003: 144,000 votes cast in a county with about 6,000 voters
- In 2006, polls opened late in several California (CA) counties (San Diego, Alameda, Plumas, Kern, Solano) due to system problems
- December 2006: Florida CD-13 post mortem of massive undervotes in a hotly contested race
- South Bronx, NY, 2010: a scanner miscounted 69/103 (70%) of ballots in Sep., then 156/289 (54%) in Nov.
- Los Angeles, CA, 2020: electronic poll books had connectivity problems, resulting in unacceptably long lines; BMDs failed, had paper jams

Adding Cryptography

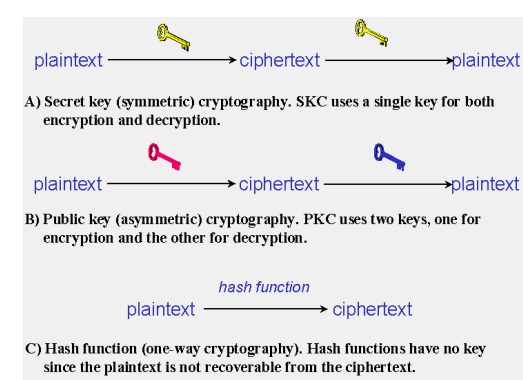

- RABA: Diebold’s implementation of SSL protected confidentiality of precinct results, *but not integrity*
- Yolo County analysis: Hart used “random” access code on eSlates
 - Actually “pseudo-random”, and it took looking at 20 such codes in sequence to regenerate all 10,000 possible codes (same for all systems)

A Classic Example of Crypto

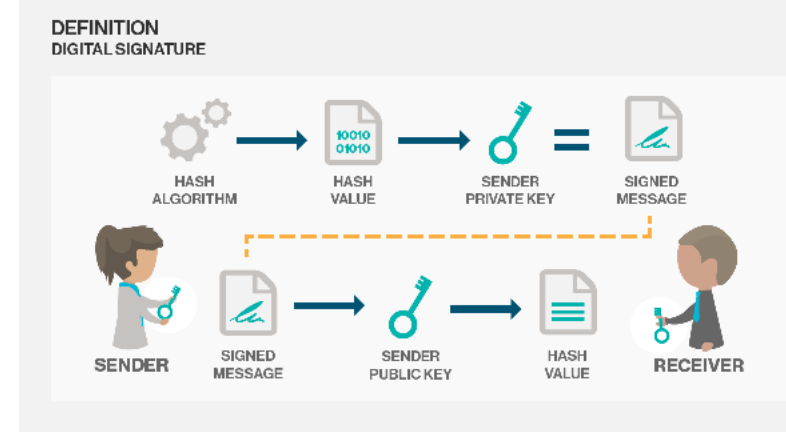

- Diebold added digital signatures to ballots in the version after the one California reviewed
 - Not examined in TTBR because it wasn't certified in California
- FSU SAIT: Alec Yasinsac and his team examined it
 - Signing technique was flawed, enabling forging of ballots

When Random Isn't Random

- Hart Intercivic systems have 2 components
 - Hart e-voting system
 - Judge's Booth Controller
- JBC generates a "random" 4 digit number
- Voter goes to e-voting system, enters number, and then can vote
- But numbers are pseudorandom, *not* random
- Students generated 100 numbers, then wrote down the next 100 numbers
 - And verified they were correct

How to Get There

- You need both standards and testing
- They must be independent of the developers of the systems
- They need to consider the users, operators, and maintainers of the systems
- Reports should show what tested, why, and how
- For e-voting systems, penetration testing is a *must*

Add in the Internet



- It will enable authorized voters who cannot vote due to distance (or other factors) to do so
- It will increase authorized voter participation
- It will bring our elections into the modern, technological world
- It will be cheaper because we don't have to store the paper ballots

Problem:

- Election systems are now accessible to many more people than authorized voters!

Where Would Attackers Strike?

- Probably not regular, individual electronic voting systems
- Attack the voter registration databases to disenfranchise voters
- Or attack the vendors and change the programs that run on those systems, or on the tallying systems



Internet Elections


- If we can bank over the Internet, why don't we vote?
- Won't it increase election turnout?
- Attack surface increases
 - Election office resources won't increase enough

And If You Vote via Internet ...

- Is your home PC/Mac secure?
- Is your smartphone secure?
- Are your router, ISP, ... secure?



And If You Vote via Internet ...

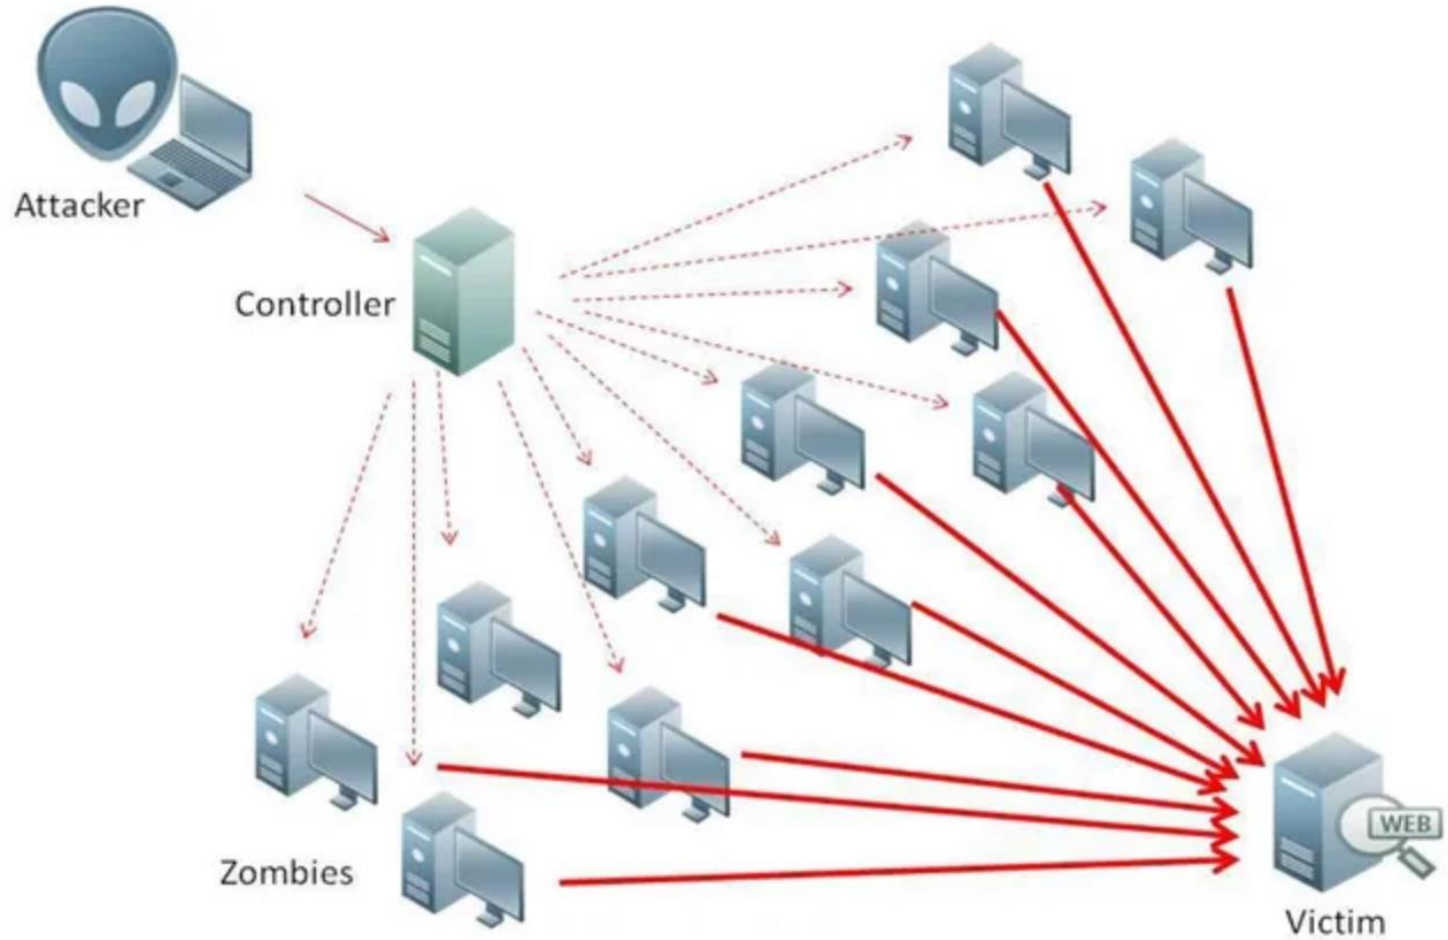

Remote Voter Verification of Ballots

- Trick here is to protect against the validating mechanism being corrupted
- Example: we examined a system that enabled voters to check that their ballots were recorded correctly, and counted correctly, remotely
 - Used very neat cryptography, done by experts
 - We simply changed the web page on which the information that the user used to do the validation – no cryptography involved!

Moral: attackers don't have to rig or corrupt an election
They just have to make you *think* they did!

Blockchains

- Background
 - Take ballot or chain of ballots and compute a hash from them
 - Encrypt this with a cryptographic key you keep secret (private key)
 - Publish the inverse cryptographic key (public key) so others can verify the small value was not changed
- For voting: many proposals for handling the chains

Why Blockchains Fail for Elections

- Problem #1: denial of service (already discussed)
- Problem #2: how are those cryptographic keys generated?
 - A. Voter generates the pair (this is how it's usually done for other uses), and publishes the public key
 - A'. I vote multiple times, possibly under the name of a different voter each time. Prove I was the one who did this, and determine which votes are mine.
 - A''. I want to sell my vote. I give my private key to the purchaser. She can use the public key to verify that is my private key, and then see how I voted by finding the specific ballot added using that public key.
 - B. Election officials assign key. Now *they* can determine how I voted!

How Not to Test Voting Over the Internet

- Occasional bills in various legislatures to do a “pilot study” using Internet voting in a real election
- A valid test requires knowing “ground truth”, that is, what the results of the election should be
- How do you know this in a real election?



The Take-Aways

- Know requirements of an election so you can *define* what you want
- Any computers used in an election process can be corrupted, so use good auditing techniques during the canvass
- And make sure the auditing techniques have good data!
 - Read: paper, as of now
- Given current election requirements, Internet voting poses great risks
 - The specific risks depend on how you do it

Remember, I don't have to rig an election to corrupt it; I just have to make you think I did!!!

The World's Easiest Test

Peter Langston

posted to the YUCKS Digest

How long did the Hundred Years War last?

116 years (from 1337 to 1453).

In which country are Panama hats made?

Ecuador.

What does catgut come from?

Sheep and horses.

What is a camel's hair brush made of?

Squirrel fur.

What kind of creatures were the Canary Islands named after?

A large breed of dogs. The Latin name was *Insularia Canaria* — “Island of Dogs”.

What was King George VI's first name?

Albert. When he came to the throne in 1936, he respected the wish of Queen Victoria that no future king should be called Albert.

What color is a purple finch?

The distinctively colored parts are crimson.